


The New KIC Profile Setter

K² Advantages

Conveniently view and share profiles on mobile devices

- Robust Hardware
- Ease of Use
- Oven Setup Software
- Viewing on Mobile Devices
- 24 Hour World Class Customer Support

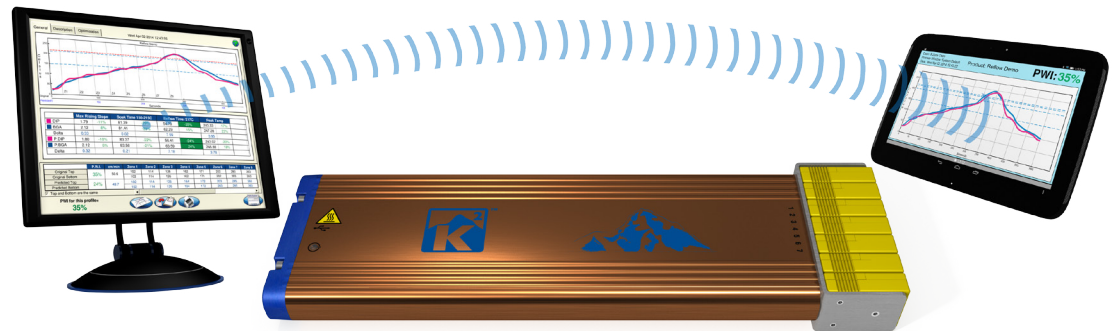

New Generation Mid-Range Profile Setter

- New generation profile setter replaces the last of KIC's older technology profilers
- Competitively priced for the mid-range market

Compact and Robust Hardware

- The K² will fit through the tight heated chambers often found in lead-free production
- 7 TC unit dimensions:
206 x 60 x 17 (mm)
Shield: 302 x 75 x 23 (mm)
- 9 TC unit dimensions:
206 x 75 x 17 (mm)
Shield: 312 x 90 x 23 (mm)
- Durable hardware designed to withstand rough production environments

Fail-Safe Operation

- Automatic start when temperatures are below a specified 'start' trigger, protecting the K² and assuring consistent starting points and repeatable profiles
- Hardware designed for accurate measurements
- Engineer sets quality and productivity related parameters:
 - ✓ PWI level
 - ✓ Minimum/maximum allowable conveyor speed
 - ✓ Maximum peak temperature, etc.
- For use by operators, technicians and engineers

Oven Setup Software

- KIC's optimization software does a complete search for all possible combinations of oven zone temperatures and conveyor speeds. It selects the very best oven setup for each new product within seconds
- User selectable setup criteria focuses on positioning the profile towards:
 - ✓ the center of the process window
 - ✓ maximum conveyor speed
 - ✓ minimum oven electricity usage

Instant and Objective Profile Analysis

- KIC's famous Process Window Index (PWI) explains how the profile fits the established process window, with a single number:
 - ✓ PWI above 100 = profile out of spec
 - ✓ PWI at 100 = profile right on the spec limit
 - ✓ PWI below 100 = profile in spec
 - ✓ PWI at 0 = the exact center of the process window
- Immediate profile analysis
- Objective and personnel-independent profile analysis
- Outlying profile data made visible

Accessing the K² Profile Data on the PC or Mobile Device

- The profile data can be displayed in two ways:
 - ✓ On the oven PC or profiling PC
 - ✓ On an Authorized Android mobile device
- Convenient sharing function for selected profile data

Mobile Device Compatible

Thermal Profile Setter



Technical Support
24 Hours Every Day
Everywhere

Risk Free Guarantee

All KIC products are designed to give maximum value and fast payback by streamlining your thermal process. Investment in a KIC product is a step toward total process control and quality management. All KIC products come with a no questions asked, 30 day money back guarantee.

For more information on any of our products or service please visit us on the Web at: www.kicthermal.com or www.kic.cn.

Service Available

- Technical Support
- Installation and Setup
- Application Support
- Hardware Support
- Guaranteed Warranty



Accuracy: ± 0.5°C
 Resolution: 0.1°C
 Internal Operating Temp: 0°C to 85°C
 Sample Rate: 0.1 to 10 readings/sec
 Data Points: 224,640
 PC Connection: USB 2.0 (Std-A/Mini-B)
 Power Requirements: (3) AAA batteries
 Thermocouple Compatibility:
 7, 9 Channel Unit: Type K, Standard
 Temperature Range: -150°C to 1050°C
 Dimensions (L x W x H mm):
 7 Channel Unit: 206.0 x 60.0 x 17.0
 9 Channel Unit: 206.0 x 75.0 x 17.0
 Thermal Shields: See *Temperature Tolerance Table* below for specifications.


Datalogger Model: data are downloaded to the computer through a USB cable after the run.

KIC's Mobile Profile Viewer is WiFi and Bluetooth compatible.

Note: The KIC software may interface directly with some oven controllers, eliminating the need for manual setpoint data entry. Please consult your oven supplier for availability. The KIC software is dongle protected.

Accuracy based on factory calibration.

THE PROCESS WINDOW INDEX™

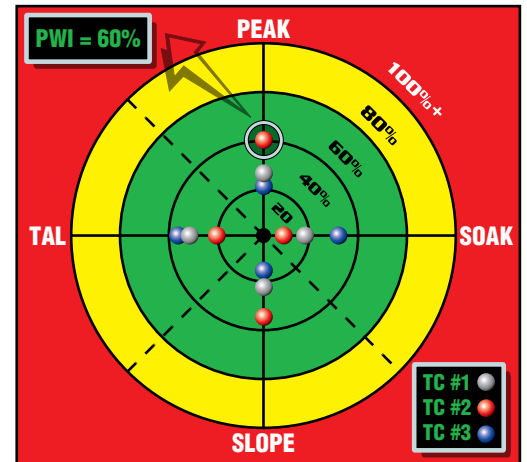

Profiling Reduced to a Single Number

The PWI measures the profile's fit to the process window in a mathematical and objective manner by using a single number. This aids in optimizing the process by comparing and ranking alternative profiles in terms of their fit to the available process window. The lower the PWI, the more efficient and stable the process! (See the PWI data sheet for a detailed explanation)

TEMPERATURE TOLERANCE TABLE

(maximum endurance in minutes at specified temperature)

CONFIGURATION	DIMENSIONS (mm) (Length x Width x Height)	150°C	200°C	250°C	300°C	350°C	400°C
Cool Touch Stainless Steel Shield, 7CH	302 x 75 x 23	17.5	12.0	9.0	7.7	6.5	
Cool Touch Stainless Steel Shield, 9 CH	312 x 90 x 23	18.1	13.1	10.1	8.4	6.7	
HT Shield 400	298 x 106 x 29	24.9	17.6	14.0	11.5	10.1	9.2

K² Kit Contents

Profile Setter	Carrying Case
Thermal Shield	Thermocouples*
Software CD	Electronic User Manual
Software Protection Dongle	Electronic Hardware Guide
USB Cable (A Male/Mini-B)	Gloves
AAA Batteries (6)	Getting Started Guide
Scissors	Calibration Certificate

* These items may vary according to specific models ordered.

COMPUTER CONFIGURATION

Minimum System Requirements

- Dual Core / 1 GHz Processor PC with 2 GB RAM
- 2 GB available storage
- Video 1024 x 768 resolution / 16-bit
- 1 available USB port (for data download)
- 1 available USB port (for software key)

Visit our website at <http://kicthermal.com/support-download/os-compatibility-chart> for product compatibility with Windows operating systems.



Corporate Headquarters
 16120 West Bernardo Drive • San Diego, CA 92127 USA
 +1(858)673-6050 Phone • +1(858)673-0085 FAX
sales@kicmail.com • tech@kicmail.com

European Regional Office
europe.sales@kicmail.com • europe.tech@kicmail.com

Asian Regional Office
asia.sales@kicmail.com • asia.tech@kicmail.com

kicthermal.com

kic.cn